
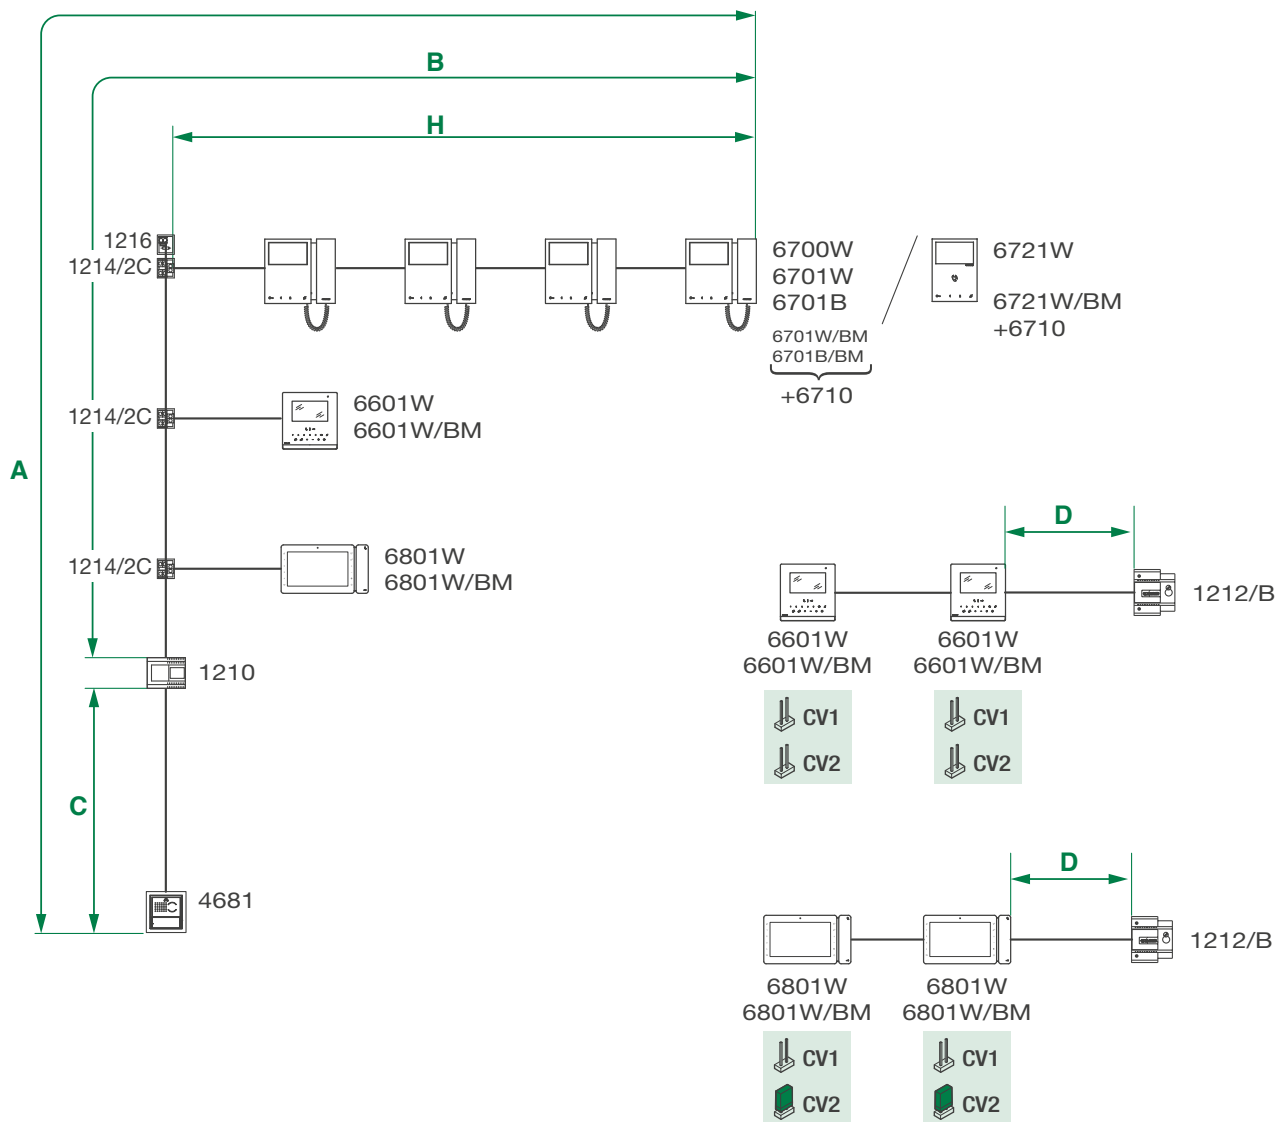



System functions

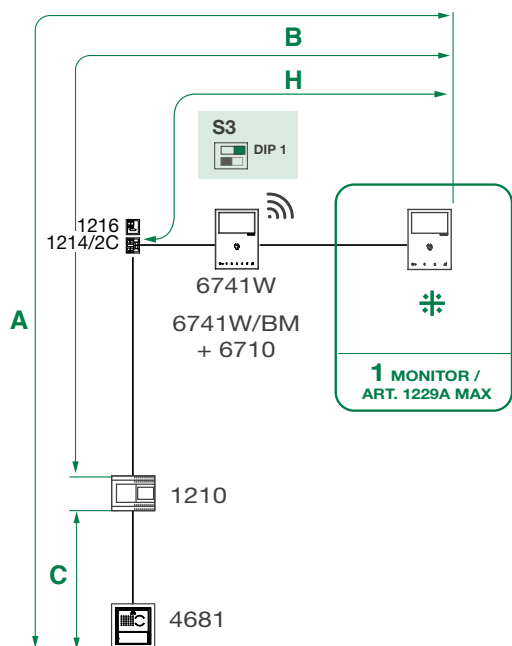

KIT MODE

















BUILDING MODE:

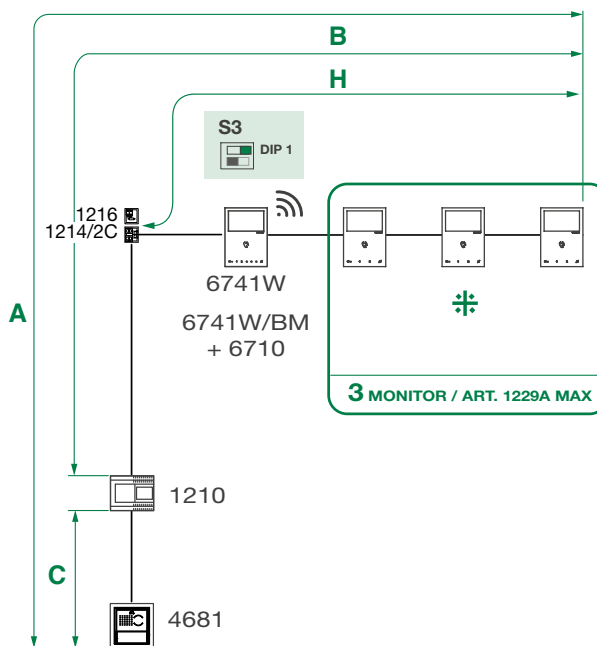















* Compatible secondary monitors: 6700W, 6701W (/BM), 6701B (/BM), 6721W (/BM), 6801W (/BM)

Distances valid for articles: 6700W, 6701W(/BM), 6701B(/BM), 6721W(/BM), 6801W(/BM), 6741W(/BM)


	A MAX	B MAX	C MAX	H MAX	D MAX	Art. 1216
Comelit Art. 4577/4579 1 mm ² (Ø 1,2 mm AWG 17) 	260 m (850 feet)	130 m (425 feet)	130 m (425 feet)	50 m (164 feet)	100 m (328 feet)	
UTP5 cat. 5 0,2 mm ² (Ø 0,5 mm AWG 24) 	80 m (260 feet)	40 m (130 feet)	40 m (130 feet)	30 m (98 feet)	/	
0,28 mm ² (Ø 0,6 mm AWG 23) 	100 m (328 feet)	50 m (164 feet)	50 m (164 feet)	30 m (98 feet)	10 m (32,5 feet)	
0,5 mm ² (Ø 0,8 mm AWG 20) 	140 m (460 feet)	70 m (230 feet)	70 m (230 feet)	30 m (98 feet)	25 m (82 feet)	
1 mm ² (Ø 1,2 mm AWG 17) 	200 m (656 feet)	100 m (328 feet)	100 m (328 feet)	40 m (130 feet)	50 m (164 feet)	
1,5 mm ² (Ø 1,4 mm AWG 15) 	80 m (260 feet)	40 m (130 feet)	40 m (130 feet)	30 m (98 feet)	100 m (328 feet)	
UTP5 cat. 5 0,2 mm ² (Ø 0,5 mm AWG 24) MULTI PAIR CABLE ⚡ 	260 m (850 feet)	130 m (425 feet)	130 m (425 feet)	50 m (164 feet)	/	

Distances valid for Art. 6601W(/BM)

	A MAX	B MAX	C MAX	H MAX	D MAX	Art. 1216
Comelit Art. 4577/4579 1 mm ² (Ø 1,2 mm AWG 17) 	160 m (525 feet)	70 m (230 feet)	90 m (295 feet)	30 m (98 feet)	100 m (328 feet)	
UTP5 cat. 5 0,2 mm ² (Ø 0,5 mm AWG 24) 	80 m (263 feet)	40 m (130 feet)	40 m (130 feet)	30 m (98 feet)	/	
0,28 mm ² (Ø 0,6 mm AWG 23) 	90 m (295 feet)	40 m (130 feet)	50 m (164 feet)	30 m (98 feet)	10 m (32,5 feet)	
0,5 mm ² (Ø 0,8 mm AWG 20) 	110 m (360 feet)	50 m (164 feet)	60 m (197 feet)	30 m (98 feet)	25 m (82 feet)	
1 mm ² (Ø 1,2 mm AWG 17) 	140 m (460 feet)	70 m (230 feet)	70 m (230 feet)	30 m (98 feet)	50 m (164 feet)	
1,5 mm ² (Ø 1,4 mm AWG 15) 	60 m (197 feet)	30 m (98 feet)	30 m (98 feet)	30 m (98 feet)	100 m (328 feet)	
UTP5 cat. 5 0,2 mm ² (Ø 0,5 mm AWG 24) MULTI PAIR CABLE ⚡ 	240 m (786 feet)	120 m (393 feet)	120 m (393 feet)	60 m (197 feet)	/	

⚡ UTP cable with multi-cable connection: FOLLOW THE COLOURS SHOWN IN THE DIAGRAM!

Distances with video distributor 4840

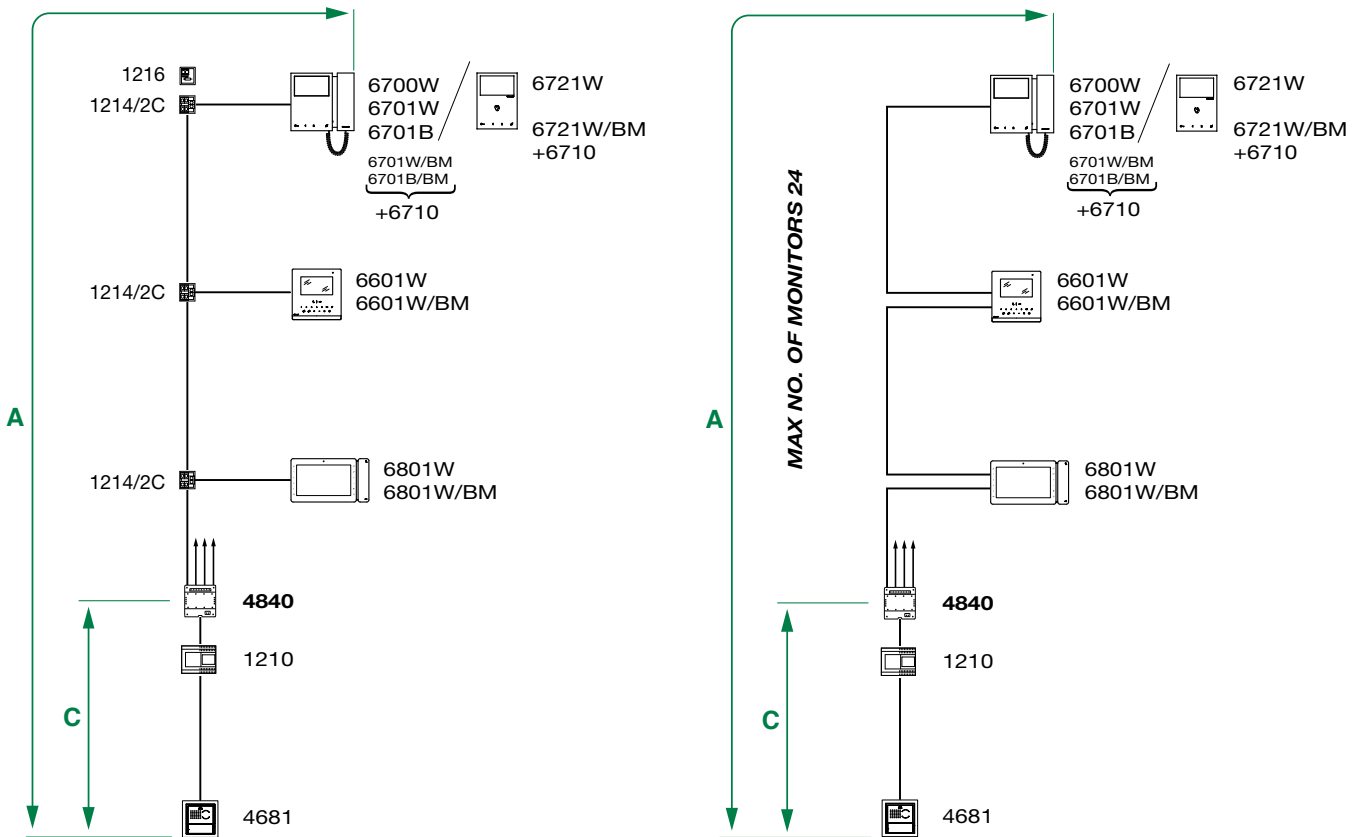

	A MAX			C MAX			Art. 1216
	6700W, 6701W(/BM), 6701B(/BM) 6721W(/BM) MINI	6801W(/BM) MAXI	6601W(/BM) ICONA	6700W, 6701W(/BM), 6701B(/BM) 6721W(/BM) MINI	6801W(/BM) MAXI	6601W(/BM) ICONA	
Comelit Art. 4577/4579 1 mm ² (Ø 1,2 mm AWG 17)	160 m (525 feet)	90 m (295 feet)	90 m (295 feet)	80 m (263 feet)	40 m (131 feet)	40 m (131 feet)	
UTP5 cat. 5 0,2 mm ² (Ø 0,5 mm AWG 24)	70 m (230 feet)	50 m (164 feet)	50 m (164 feet)	40 m (131 feet)	25 m (82 feet)	25 m (82 feet)	
0,28 mm ² (Ø 0,6 mm AWG 23)	70 m (230 feet)	50 m (164 feet)	50 m (164 feet)	40 m (131 feet)	25 m (82 feet)	25 m (82 feet)	
0,5 mm ² (Ø 0,8 mm AWG 20)	70 m (230 feet)	50 m (164 feet)	50 m (164 feet)	40 m (131 feet)	25 m (82 feet)	25 m (82 feet)	
1 mm ² (Ø 1,2 mm AWG 17)	100 m (328 feet)	60 m (197 feet)	60 m (197 feet)	50 m (164 feet)	30 m (98 feet)	30 m (98 feet)	
1,5 mm ² (Ø 1,4 mm AWG 15)	50 m (164 feet)	40 m (131 feet)	30 m (98 feet)	25 m (82 feet)	25 m (82 feet)	15 (49 feet)	
UTP5 cat. 5 0,2 mm ² (Ø 0,5 mm AWG 24) MULTI PAIR CABLE ‡	130 m (426 feet)	100 m (328 feet)	100 m (328 feet)	65 m (213 feet)	50 m (164 feet)	50 m (164 feet)	

‡ UTP cable with multi-cable connection: FOLLOW THE COLOURS SHOWN IN THE DIAGRAM!