


■ Data sheet: Switch Netz-0-Not, Series installation, 4-pole 63A, 22kW

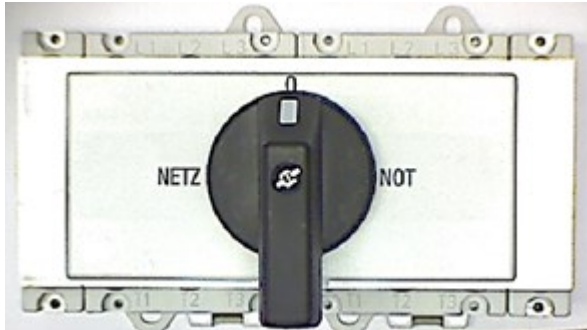

■ SCHRACK-INFO


- Switch Netz-0-Not for series installation
- Protection class IP40 from front
- 4-Pole

■ Technical Data

Rated current	63A
Overvoltage category	I to III
Pollution degree	3
Rated impulse withstand voltage U <sub>im</sub>	6kA
Mounting height	60mm
IP Rating	IP40
Mounting	Distributor mounting
Pole	4
Rated insulation voltage U <sub>i</sub>	690V
Ambient temperature Enclosed	-40°C - +40°C
Ambient temperature Open	-40°C - +60°C
Ambient temperature Storage	-50°C - +90°C
Net weight	0,64kg

Terminal capacity	Solid or Stranded	0,75 - 2,5mm <sup>2</sup>
	Flexible with ferrule	0,75 - 2,5 (1,5)mm <sup>2</sup>
Rated operational current I <sub>e</sub> AC21A		63A
Rated operational voltage U <sub>e</sub> max. AC21A		690V
Making capacity I <sub>eff</sub>	3x380-440V	370A
Breaking capacity	3x220-240V	330A
	3x380-440V	330A
	3x660-690V	190A
Separator conditions met until		690V
Motor switch AC3	3x400V	37A
	3x220-240V	11kW
Main switch AC23	3x400V	45A
Motor switch AC23A	3x220-240V	15kW
Main switch AC23B	3x380-440V	22kW
Repair switch	3x660-690V	18,5kW
Conditional rated short-circuit current	400V	10kA
	690V	5kA
Rated short-time withstand current (1 s current)		600A
Maximum back-up fuse gL (gG)	400V	63A
	690V	63A

**■** Circuit diagram

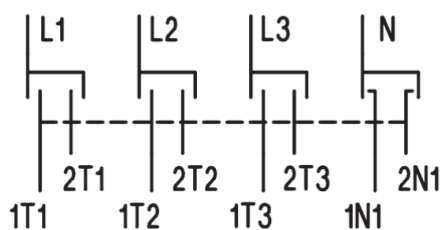

**■** Article number

Description	Order number
Switch Netz-0-Not, Series installation, 4-pole 63A, 22kW	IN8R3463—