




X3-HYBRID-G4-CT

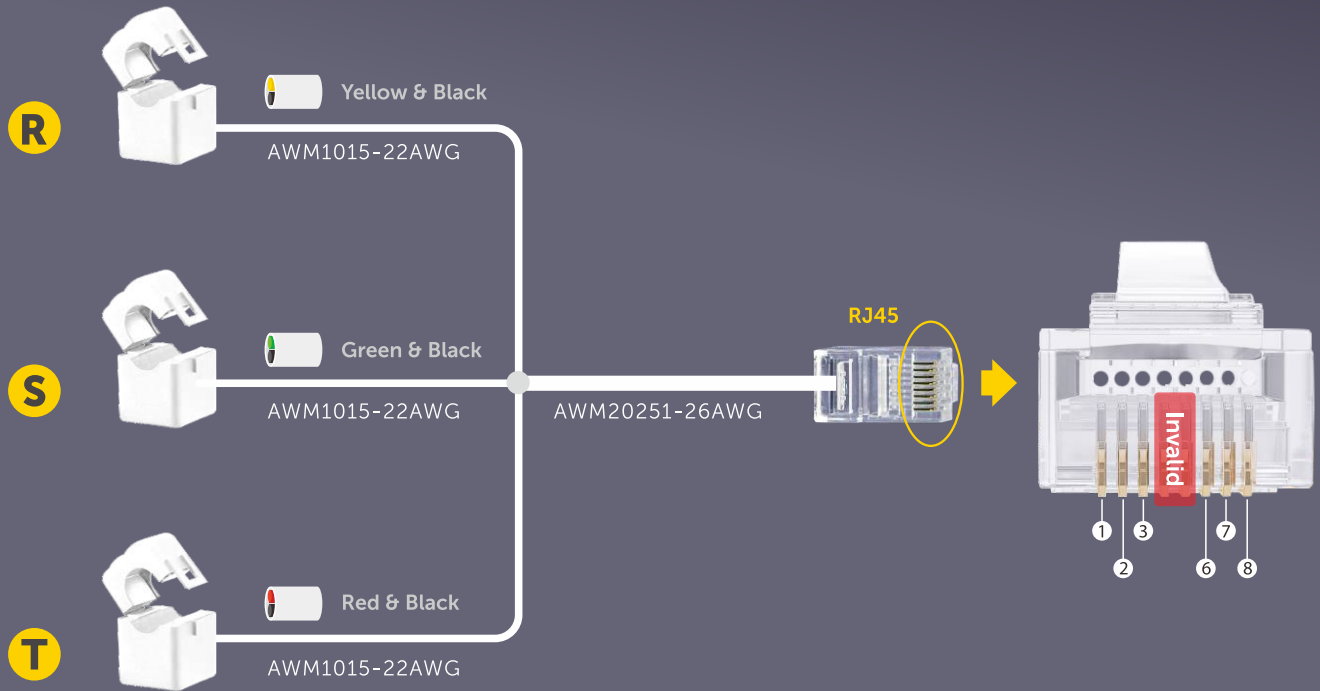

*The length of the wire which links CT and RJ45 Port is 400±20mm

MODEL	X3-HYBRID-G4-CT
ELECTRIC PARAMETER	
Primary rated current [A]	100
Secondary rated current [mA]	33.33
Sampling nominal tolerance [%]	±0.5
Rated frequency [Hz]	50\60
ENVIRONMENTAL REQUIREMENTS	
Operating temperature [°C]	-10~50
Humidity	≤85°relative humidity, no condensation
Storage temperature [°C]	-20~70
Operating altitude (max.) [m]	1000
Shell material	White, flame retardant grade 94-V0
Secondary output cable	AWM1015-22AWG yellow-black/green-black/red-black stranded wire (A/B/C three-phase) + AWM20251-26AWG 6-core lead wire end crimped 8-core RJ45 crystal head, the total lead length is 0.4m±0.02m (Does not include crystal head) AWM1015-22AWG (600V, 105°C) AWM20251-26AWG (150V, 60°C)
CERTIFICATION	
Safety	CE/RoHS