


Klemsan®

495059 KD 4

KD 4

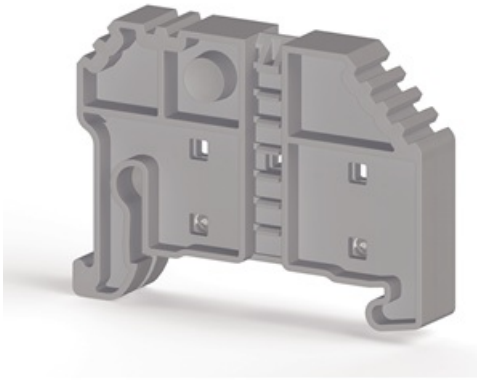

General Product Information

Insulating material	PA
Inflammability class acc. to UL 94	V2
Quantity	100
Operation Temperature Min.-Max.	-55 / 120 °C

Dimensions

Width	8 mm
Length	46,8
Height	35,4 / 42,9 mm

Mounting Rails



●
35x15, Slotted

MR 35x15-MR



●
MR 35x15 (1 m.)-MR 35x15 (1 m.) Non-Slotted



●
35x7,5 - Slotted

MR 35x7,5-MR



●
MR 35x7,5 (1 m.)-MR 35x7,5 (1 m.) Non-Slotted

Group Markings



● ME 1-1-KD 4 can be used with stopper , transparent group label.



● ME 1-2-KD 4 can be used with stopper , transparent group label.



● ME 2-2-KD 4 can be used with stopper , transparent group label.



● ME3-KD 7 can be used with stopper , transparent group label.

LAPEM - RETIE Sertifikası - LAPEM - Retie Certificate

AutoCat File

CAD Files

Order Info

	495050	KD 4
	495059	KD 4
