



# Art. 6741W (/BM) in systems powered by Art. 1210/1210A

Max. number of riser-powered 6741W (/BM) with the same user code	1
Call repetition devices that can be used	1229A
Maximum number of internal units (including call repetition devices) with the same user code	2 in kit mode 4 in building mode
Maximum number of internal units that can be powered by Art. 1210/1210A	100

## Operating distances

**KIT MODE:** MAX 10 MONITORS / ART. 1229A

**BUILDING MODE:** MAX 100 MONITORS / ART. 1229A

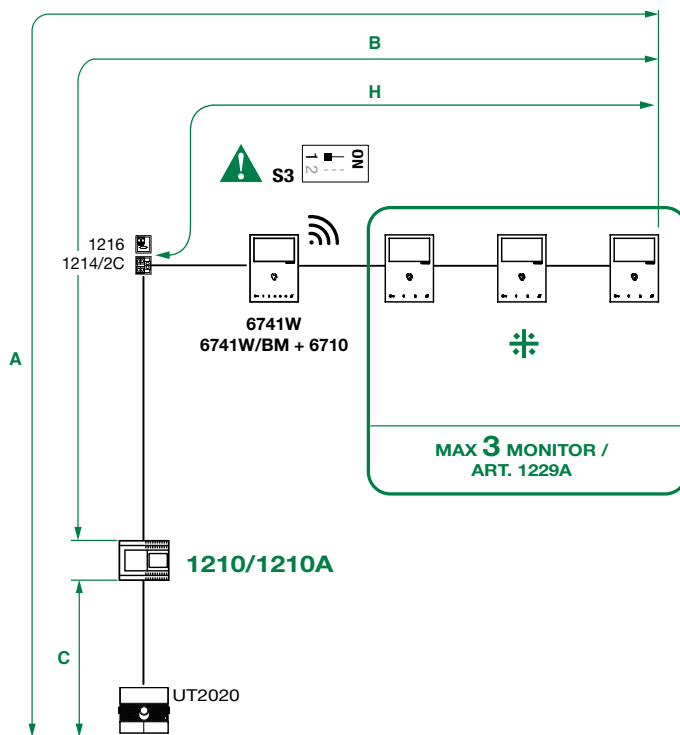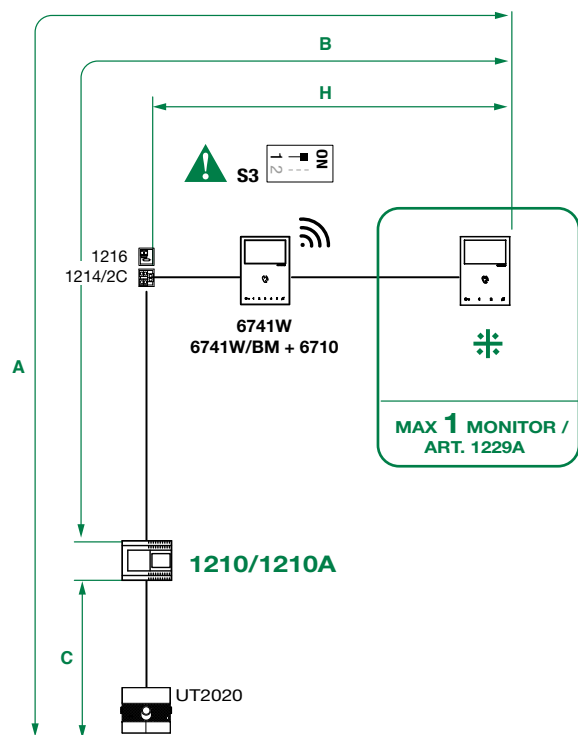

	A max	B max	C max	H max
Comelit Art. 4577/4579 1 mm <sup>2</sup> (Ø 1.2 mm AWG 17) 	260 (850 feet)	130 (425 feet)	130 (425 feet)	50 (164 feet)
UTP5 cat. 5 0.2 mm <sup>2</sup> (Ø 0.5 mm AWG 24) 	80 (260 feet)	40 (130 feet)	40 (130 feet)	30 (98 feet)
0.28 mm <sup>2</sup> (Ø 0.6 mm AWG 23) 	100 (328 feet)	50 (164 feet)	50 (164 feet)	30 (98 feet)
0,5 mm <sup>2</sup> (Ø 0,8 mm AWG 20) 	140 (460 feet)	70 (230 feet)	70 (230 feet)	30 (98 feet)
1 mm <sup>2</sup> (Ø 1.2 mm AWG 17) 	200 (656 feet)	100 (328 feet)	100 (328 feet)	40 (130 feet)
1.5 mm <sup>2</sup> (Ø 1.4 mm AWG 15) 	80 (260 feet)	40 (130 feet)	40 (130 feet)	30 (98 feet)
UTP5 cat. 5 0.2 mm <sup>2</sup> (Ø 0.5 mm AWG 24) MULTI PAIR CABLE 	260 (850 feet)	130 (425 feet)	130 (425 feet)	50 (164 feet)



UTP cable with multi-cable connection: FOLLOW THE COLOURS SHOWN IN THE DIAGRAM!