




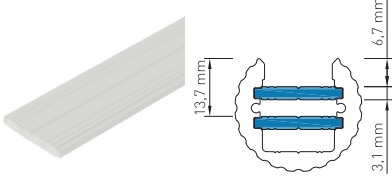

















PROFIL ZUBEHÖR PROFILE ACCESSORIES		
 <p>LIPZ001002 Seilabhängiger 2m inkl. Deckenbefestigung Wire suspension 2m incl. ceiling fixture</p>	 <p>LIPZ001005 Seilabhängiger 5m inkl. Deckenbefestigung Wire suspension 5m incl. ceiling fixture</p>	 <p>LIPZ002001 Seilstopper inkl. M4 Senkkopfschraube Wire stopper incl. M4 countersunk screw</p>
 <p>LIEK100002 Torx Bit TX8 für Endkappenschrauben Torx Bit TX8 for endcap screws</p>	 <p>LIPZ003007 Einbau Montagewinkel CL und LBKI Mounting angle CL and LBKI</p>	 <p>LIAP100001 Aluminium Flachmaterial Aluminium flat material</p>

					
0° Schwenkung Slewing	15° Schwenkung Slewing	30° Schwenkung Slewing	45° Schwenkung Slewing	60° Schwenkung Slewing	Abmessung Dimension

LBS PROFIL BESTÜCKT MIT FLEXSTRIP 36 RGB MIT EINEM LED ABSTAND VON 33MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN LBS PROFILE FITTED WITH FLEXSTRIP 36 RGB WITH A LED DISTANCE OF 33MM IN COMBINATION WITH THE DIFFERENT COVERS		
<p>PMMA Abdeckung LB Flach Transparent 91% Transmission</p> 	<p>PMMA Abdeckung LB Flach Opal 50% Transmission</p> 	<p>PMMA Abdeckung LB Eckig Opal 50% Transmission</p> 
<p>PMMA cover LB flat transparent 91% transmission</p>	<p>PMMA cover LB flat milky 50% transmission</p>	<p>PMMA cover LB square milky 50% transmission</p>
LBS PROFIL BESTÜCKT MIT FLEXSTRIP 72 MIT EINEM LED ABSTAND VON 16,5MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN LBS PROFILE FITTED WITH FLEXSTRIP 72 WITH A LED DISTANCE OF 16.5MM IN COMBINATION WITH THE DIFFERENT COVERS		
<p>PMMA Abdeckung LB Flach Transparent 91% Transmission</p> 	<p>PMMA Abdeckung LB Flach Opal 50% Transmission</p> 	<p>PMMA Abdeckung LB Eckig Opal 50% Transmission</p> 
<p>PMMA cover LB flat transparent 91% transmission</p>	<p>PMMA cover LB flat milky 50% transmission</p>	<p>PMMA cover LB square milky 50% transmission</p>
LBS PROFIL BESTÜCKT MIT FLEXSTRIP 48 ODER 72 DW MIT EINEM LED ABSTAND VON 7,15MM IN KOMBINATION MIT DEN UNTERSCHIEDLICHEN ABDECKUNGEN LBS PROFILE FITTED WITH FLEXSTRIP 48 OR 72 DW WITH A LED DISTANCE OF 7.15MM IN COMBINATION WITH THE DIFFERENT COVERS		
<p>PMMA Abdeckung LB Flach Transparent 91% Transmission</p> 	<p>PMMA Abdeckung LB Flach Opal 50% Transmission</p> 	<p>PMMA Abdeckung LB Eckig Opal 50% Transmission</p> 
<p>PMMA cover LB flat transparent 91% transmission</p>	<p>PMMA cover LB flat milky 50% transmission</p>	<p>PMMA cover LB square milky 50% transmission</p>