

Modular LED-phase-indicator




Schrack-Info

- 3-phase-indicator
- LED technology
- Low power loss


BZ106803

Type	BZ127904
Function	3-phase-indicator
Rated voltage LED	230/400V-AC
Colour of LED	3 x green
Standards	EN 61000-4-2, EN 61000-4-4, EN 61000-4-5, EN 60669, EN 60947-5-1, EN 61000
Rated frequency at AC	50/60Hz
Power loss	0,096W
Rated impulse withstand voltage U_{imp}	6kV
Overtoltage category	iV
Max. back-up fuse	16A gG
Degree of protection	IP20 (covered IP40)
Touch protection	finger and hand touch safe BGV A3, VBG4
Terminal	Lift terminal
Terminal capacity	flexible 1 x 1,5 - 2,5mm ² solid 1 x 1,5 - 4 mm ² or 2 x 1,5mm ²
Tightening torque	0,5Nm

Dimensions

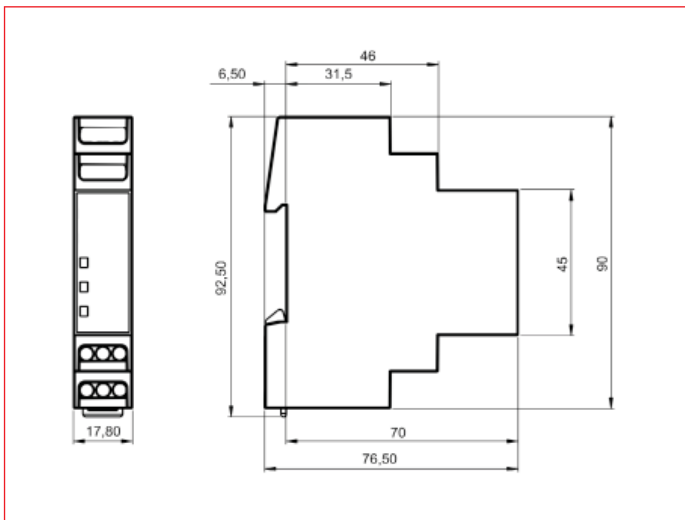

Wiring diagram

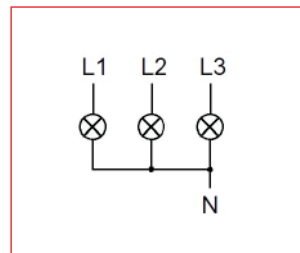

DESCRIPTION	AVAILABLE	ORDER NO.
Phase indication 3-pole, 230/400V-AC		BZ106803